




Brushed Nickel (BN) finish

5178 LED

The 5178 features a slim, minimalist design and can be mounted horizontally over a mirror or vertically as a sconce. Diffuser is constructed of stout, matte-white acrylic with three sizes to choose from. Housing and decorative ends are standard in Brushed Nickel with optional finishes available.

FINISHES



ZOOM-SQ

STANDARD SPECIFICATIONS

HOUSING

Cold rolled steel, die-formed, and assembled with hardware and welds. The housing can be mounted horizontal or vertical.

DIFFUSER

Translucent, UV stabilized white acrylic. The extruded material can withstand minor impact without breaking. The decorative end caps are attached with countersunk fasteners.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 90+ CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

H16 - 16W nominal, .14 A input - 1701 lm. Dimmable (0-10V).

H21 - 21W nominal, .18 A input - 2038 lm. Dimmable (0-10V).

H25 - 25W nominal, .20 A input - 2610 lm. Dimmable (0-10V).

H31 - 31W nominal, .27 A input - 3181 lm. Dimmable (0-10V).

H32 - 32W nominal, .26 A input - 3999 lm. Dimmable (0-10V).

H41 - 41W nominal, .35 A input - 4885 lm. Dimmable (0-10V).

MOUNTING

Fixture mounts to a 2x4 j-box (by others). 2x4 box must be positioned horizontally if mounting fixture horizontally and vertically if mounting fixture vertically. 4x4 j-box cover plate included, matched to the specified fixture finish. 4x4 cover plate will not assist in covering a 2x4 box that is positioned perpendicular to the direction of the fixture unless a custom bracket is used - contact factory.

FINISH

The 5178 series is finished in brushed nickel as a standard. It is available in all Brownlee paint finishes as an optional offering. Plated finishes such as Brushed Nickel are suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.


PROJECT:

MODEL #:

FIXTURE TYPE:



BN finish

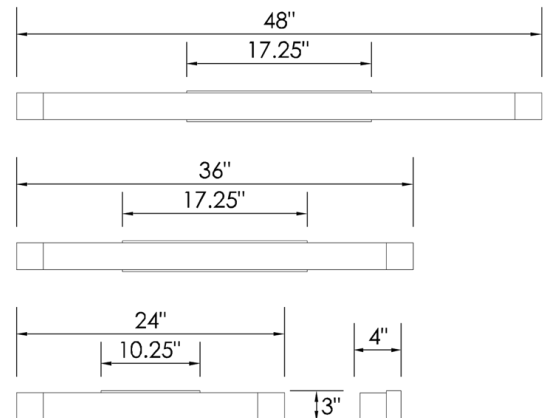

DAMP



RoHS
COMPLIANT
ELECTRONICS



ORDERING INFORMATION

5178

Model

2.

3.

4.

5.

6. (if required)

2. SIZE

24 L: 24"
36 L: 36"
48 L: 48"

3. FINISH

STANDARD
BN Brushed Nickel

OPTIONAL
BL Black
BZ Bronze
GM Gun Metal
MB Metallic Bronze
MG Metallic Gold
NT Nickel Tone
WH White

CUSTOM
Provide color sample or RAL
code to match

4. WATTAGE

24 SIZE
H16 16W H Series LED
H21 21W H Series LED

36 SIZE
H25 25W H Series LED
H31 31W H Series LED

48 SIZE
H32 32W H Series LED
H41 41W H Series LED

5. COLOR TEMPERATURE

35K 3500K standard color temperature
30K 3000K color temperature
40K 4000K color temperature

6. AVAILABLE OPTIONS

BAC¹ Buy American Compliant (BAA)
DTR⁴ Triac (Line Voltage) Dimming (120V)
FCL⁷ French Canadian Labels
T24⁹ Title 24 JA8 Compliant

Universal Footnotes (only applies if superscript is shown in Options section): (0) 90R - All LEDs/CCTs are being transitioned to 90 CRI standard over 2025. Inquire for this model's availability. (1) BAC/BAB - www.brownlee.com/resources/usa. (2) BBI/BBC - cannot combine with ECW or EXT. (3) BLD - integral microwave motion sensor (step-dim). Cannot combine with DTR. (4) DTR - cannot combine with BLD. (5) ECW - cannot combine with BBI, BBC, or DTR. (7) FCL - cannot combine with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs. (10) PCH/PC4 - cannot combine with BLD or OCC.

Add'l Notes: *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F.

**BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%.

2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Config. via onboard dip switches.

Specifications subject to change without notice.

 **BROWNLEE**
LIGHTING
www.brownlee.com

REVISED
2025.04.15