

# FLYER

## STANDARD SPECIFICATIONS

### FRAME

Cold rolled steel, formed, welded assembly. The frame is secured with screws.

### HOUSING

Cold rolled steel, die-formed assembly. The housing can be mounted horizontal or vertical.

### DIFFUSER

Translucent, UV stabilized white acrylic. Diffuser is formed over a mold from sturdy material that can withstand minor impact without breaking.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs  
 Amperage rated @ 110V input  
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.  
 H16 - 16W nominal, .14 A input - 1699 lm. Dimmable (0-10V).  
 H25 - 25W nominal, .20 A input - 2509 lm. Dimmable (0-10V).

### MOUNTING

Fixture uses wall anchors (by others) appropriate for the mounting surface.


### FINISH

The 5460 series is available in all Brownlee paint finishes as a standard offering.


### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

<b>PROJECT:</b>
<b>MODEL #:</b>
<b>FIXTURE TYPE:</b>

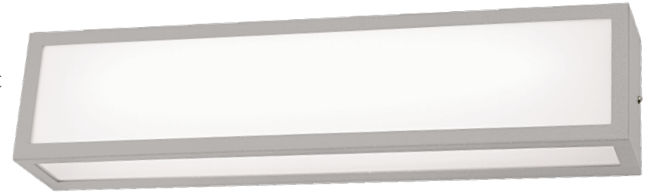

PL finish

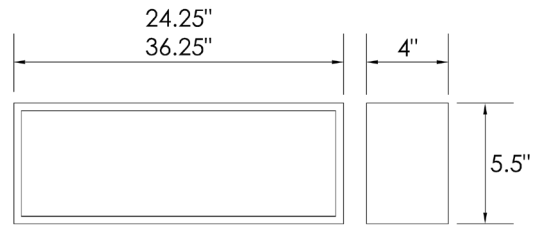

## ORDERING INFORMATION



DAMP



**5460** - \_\_\_\_\_  
 Model                      2.                      3.                      4.                      5.                      6. (if required)

### 2. SIZE

**24** L: 24.25"  
**36** L: 36.25"

### 3. FINISH

#### STANDARD

**AB** Antique Bronze  
**AS** Antique Silver  
**BL** Black  
**BZ** Bronze  
**DB** Desert Bronze  
**GM** Gun Metal  
**MB** Metallic Bronze  
**MG** Metallic Gold  
**NT** Nickel Tone  
**PL** Platinum  
**WH** White

#### CUSTOM

Provide color sample or RAL code to match

### 4. WATTAGE

**24 SIZE**  
**H16** 16W H Series LED  
**36 SIZE**  
**H25** 25W H Series LED

### 5. COLOR TEMPERATURE

**35K** 3500K standard color temperature  
**30K** 3000K color temperature  
**40K** 4000K color temperature

### 6. AVAILABLE OPTIONS

**90R<sup>0</sup>** 90 CRI (3000K only)  
**BAC<sup>1</sup>** Buy American Compliant  
**BBI<sup>2\*</sup>** Integral Battery Backup (H25 only)  
**DTR<sup>4</sup>** Triac (Line Voltage) Dimming (120V)  
**ES<sup>6</sup>** ENERGY STAR® (Not available in 90 CRI)  
**FCL<sup>7</sup>** French Canadian Labels

**Notes:** (0) **90R** - cannot be combined with ES. (1) **BAC** - cannot be combined with FCL. (2) **BBI/BBS/BBC** - cannot be combined with ECW, EXT, or T24.  
 (3) **BLD** - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) **DTR** - cannot be combined with BLD or T24.  
 (5) **ECW** - cannot be combined with BBI, BBC, or DTR. (6) **ES** - cannot be combined with 90R or T24. (7) **FCL** - cannot be combined with BAC or T24.  
 (8) **OCC** - integral ON/OFF occupancy sensor. (9) **T24** - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) **BBS** - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) **PCH/PC4** - cannot be combined with BLD or OCC.  
**Add'l Notes:** \***BBI/BBS/BBC** - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. \*\***BLD** - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

### Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.