

FLYER [TRIM]

STANDARD SPECIFICATIONS

FRAME

Cold rolled steel, formed, welded assembly. The frame is secured with screws.

HOUSING

Cold rolled steel, die-formed assembly. The housing can be mounted horizontal or vertical.

DIFFUSER

Translucent, UV stabilized white acrylic. Diffuser is formed over a mold from sturdy material that can withstand minor impact without breaking.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
 Amperage rated @ 110V input
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.
 H25 - 25W nominal, .20A input - 2509 lm. Dimmable (0-10V).

MOUNTING

Fixture uses wall anchors (by others) appropriate for the mounting surface.

FINISH

The 5461 series is available in all Brownlee paint finishes as a standard offering.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:



PL finish

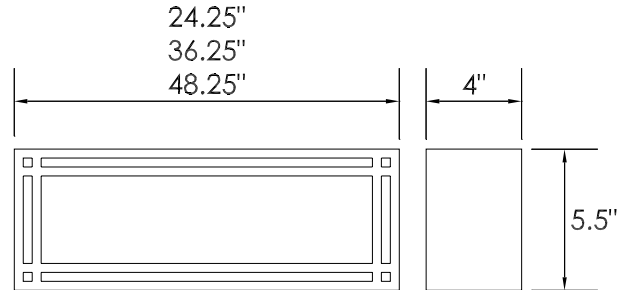

DAMP



ORDERING INFORMATION

5461 - _____
 Model 2. 3. 4. 5. 6. (if required)

<p>2. SIZE</p> <p>36 L: 36.25"</p> <p>Note: The 24" and 48" sizes have been discontinued.</p>	<p>3. FINISH</p> <p>STANDARD</p> <p>AB Antique Bronze AS Antique Silver BL Black BZ Bronze DB Desert Bronze GM Gun Metal MB Metallic Bronze MG Metallic Gold NT Nickel Tone PL Platinum WH White</p> <p>CUSTOM Provide color sample or RAL code to match</p>	<p>4. WATTAGE</p> <p>36 SIZE H25 25W H Series LED</p>	<p>5. COLOR TEMPERATURE</p> <p>35K 3500K standard color temperature 30K 3000K color temperature 40K 4000K color temperature</p> <hr/> <p>6. AVAILABLE OPTIONS</p> <p>90R⁹ 90 CRI (3000K only) BAC¹ Buy American Compliant BBI^{2*} Integral Battery Backup DTR⁴ Triac (Line Voltage) Dimming (120V) ES⁶ ENERGY STAR® (Not available in 90 CRI) FCL⁷ French Canadian Labels</p>
--	--	---	---

Notes: (0) **90R** - cannot be combined with ES. (1) **BAC** - cannot be combined with FCL. (2) **BBI/BBS/BBC** - cannot be combined with ECW, EXT, or T24. (3) **BLD** - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) **DTR** - cannot be combined with BLD or T24. (5) **ECW** - cannot be combined with BBI, BBC, or DTR. (6) **ES** - cannot be combined with 90R or T24. (7) **FCL** - cannot be combined with BAC or T24. (8) **OCC** - integral ON/OFF occupancy sensor. (9) **T24** - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) **BBS** - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) **PCH/PC4** - cannot be combined with BLD or OCC.
Add'l Notes: ***BBI/BBS/BBC** - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. ****BLD** - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.



REVISED
2020.01.19