



Black Finish



Black Finish

7110 LED

CAPSULE is a wet location rated sconce offered in three sizes. While intended for exterior facades, it also used in commercial interior applications such as elevator lobbies, hallways, and meeting rooms. Heavy duty aluminum construction, uniformly illuminated frosted acrylic diffuser, stainless steel hardware, dedicated 120-277V LED components - all standard. CAPSULE is available in two form factors: round (model #: 7110) and square (model #: 7115).

FINISHES

BL	BZ	MB	NT	WH	TB	TG	TW
----	----	----	----	----	----	----	----

CAPSULE-RD

STANDARD SPECIFICATIONS

HOUSING

Heavy duty commercial-grade assembly is constructed of formed aluminum (0.080" thickness) with welded ends. Two countersunk stainless steel fasteners are regressed behind the trim at each end of the fixture. No exposed hardware on the sides of the fixture. Rear mount plate includes factory installed closed-cell foam gasket.

DIFFUSER

UV stabilized frosted acrylic, extruded.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 90+ CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Amperage rated @ 110V input
Operating ambient temperature: -20°C / -4°F - 60°C / 140°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

15" Size: H08 - 8W nominal, .07 A input - 1060 lm. Dimmable (0-10V).

15" Size: H16 - 16W nominal, .14 A input - 1835 lm. Dimmable (0-10V).

26" Size: H16 - 16W nominal, .14 A input - 1828 lm. Dimmable (0-10V).

26" Size: H32 - 32W nominal, .27 A input - 3772 lm. Dimmable (0-10V).

49" Size: H32 - 32W nominal, .27 A input - 3758 lm. Dimmable (0-10V).

49" Size: H63 - 63W nominal, .53 A input - 7516 lm. Dimmable (0-10V).

MOUNTING

Directly to 4x4 j-box (by others). 26" and 49" size contains thru-holes for anchoring located toward top and bottom of mount plate and should be utilized to achieve a firm connection to the surface throughout (anchoring hardware by others).

FINISH

All 7110 parts are prepared using a three step pre-treatment/sealing process, followed by a powder coat primer prior to applying any of the Brownlee finishes.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:

MODEL #:

FIXTURE TYPE:

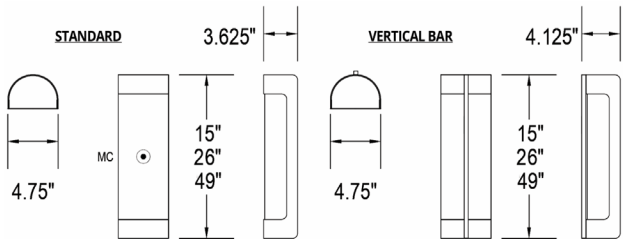

WET



RoHS
COMPLIANT
ELECTRONICS



ORDERING INFORMATION

7110 - Model - 2. - 3. - 4. - 5. - 6. - 7. (if required)

2. SIZE	3. FINISH	4. WATTAGE	6. COLOR TEMPERATURE
15" 15" length	BL Black	15 SIZE	35K 3500K standard color temperature
26" 26" length	BZ Bronze	H08 8W H Series LED	30K 3000K color temperature
49" 49" length	MB Metallic Bronze	H16 16W H Series LED	40K 4000K color temperature
	NT Nickel Tone		
	WH White	26 SIZE	
		H16 16W H Series LED	
		H32 32W H Series LED	
		49 SIZE	
		H32 32W H Series LED	
		H63 63W H Series LED	
		5. TRIM	
		VB0 No Vertical Bar	
		VB1 1 Vertical Bar*	
			7. AVAILABLE OPTIONS
			BAB ¹ Build America, Buy America Compliant (BABAA)
			BAC ¹ Buy American Compliant (BAA)
			DTR ⁴ Triac (Line Voltage) Dimming (120V)
			ECW ⁵ Extreme Cold Weather (-40°C / -40°F min.)
			FCL ⁷ French Canadian Labels
			T24 ⁹ Title 24 JA8 Compliant (H16 & H32 only)

Universal Footnotes (only applies if superscript is shown in Options section): (0) 90R - All LEDs/CCTs are being transitioned to 90 CRI standard over 2025. Inquire for this model's availability. (1) BAC/BAB - www.brownlee.com/resources/usa. (2) BBI/BBC - cannot combine with ECW or EXT. (3) BLD - integral microwave motion sensor (step-dim). Cannot combine with DTR. (4) DTR - cannot combine with BLD. (5) ECW - cannot combine with BBI, BBC, or DTR. (7) FCL - cannot combine with BAC. (8) OCC - integral microwave motion sensor (ON/OFF).

(9) T24 - includes JA8 labeling and 90 CRI LEDs. (10) PCH/PC4 - cannot combine with BLD or OCC.

Add'l Notes: *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F.

**BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%.

2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Config. via onboard dip switches.

Specifications subject to change without notice.



BROWNLEE
LIGHTING

www.brownlee.com

REVISED
2024.12.20