



7200 (surface) / 7400 (pendant)

7400 LED

The multifaceted Penny collection is comprised of both indoor (Penny-ID) and outdoor (Penny-OD) rated models. Full breakdown below

Penny-ID Surface - Model #: 2100 | Penny-ID Pendant - Model #: 2700.
Penny-OD Surface - Model #: 7200 | Penny-OD Pendant - Model #: 7400.
Penny-OD Cantilever - Model #: 7205

While minimal in terms of aesthetic, it is everything but minimal from an application standpoint. Penny is functional enough for corridor illumination, fun enough for cluster mounting in lobbies and common areas, and durable enough for outdoor environments. Penny can also be wiped down for use in healthcare settings.

FINISHES



PENNY-OD OUTDOOR PENDANT

STANDARD SPECIFICATIONS - OUTDOOR PENDANT (7400)

HOUSING + SUSPENSION

High quality cast aluminum housing. Aluminum ceiling canopy and mount plate. Standard canopy dimensions: 6" dia. x 0.75" H. Rigid stem is constructed of cold rolled steel for increased durability and is finished with an anti-corrosion powder coat. Swivel canopy optional.

DIFFUSER

UV stabilized frosted acrylic diffuser. Injection molded. Smooth uniform illumination.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

14 Size: L16 - 16W nominal, .13 A input - 1490 lm. Dimmable (0-10V).

14 Size: L32 - 32W nominal, .26 A input - 2690 lm. Dimmable (0-10V).

14 Size: L52 - 52W nominal, .44 A input - 3945 lm. Dimmable (0-10V).

INDIRECT COMPONENT (OPTIONAL)

Dedicated indirect (up light) component available as an optional offering. Wired to same circuit as direct (down light) output and not independently controllable. Contact factory if independent control is required.

Refer to Options section of spec sheet to order.

UP1 - 16W nominal, .15 A input - 1600 lm. (0-10V).

UP2 - 22W nominal, .20 A input - 2220 lm. (0-10V).

MOUNTING

Directly to j-box (by others) and further anchored to ceiling surface via provided mount plate (anchoring hardware by others). Diffuser is preinstalled on housing and should only be removed for servicing of electronics. Service Note: Suction cup (4-5" dia. with handle) required for proper removal/installation of diffuser in outdoor environments. This is not included. Third party reference: <https://amzn.to/3QJjMgY>.

FINISH

Parts are prepared using a three step pre-treatment/sealing process, followed by a durable powder coat finish. Custom colors available, contact factory.

WARRANTY

5 year limited warranty on this LED product.

ORDERING INFORMATION

7400 -						
Model		2.	3.	4.	5.	6.
2. FINISH		3. WATTAGE		5. COLOR TEMPERATURE		6. AVAILABLE OPTIONS
BL	Black	14 SIZE		35K	3500K standard color temperature	90R ⁹ 90 CRI (30K & 35K only) * *Only applies to L series
BU	Pastel Blue (RAL 5024)	L16	16W L Series LED			Optional indirect component
BZ	Bronze	L32	32W L Series LED	30K	3000K color temperature	90 CRI.*
GN	Pastel Green (RAL 6019)	L52	52W L Series LED	40K	4000K color temperature	
MG	Metallic Gold					AMF Antimicrobial Finish (BL, NT, WH only) (See AMF note)
NT	Nickel Tone					BAC ¹ Buy American Compliant (BAA)
RD	Red (RAL 3020)					DTR ⁴ Triac (Line Voltage) Dimming (120V)
TB	Textured Black					FCL ⁷ French Canadian Label
TG	Textured Grey					SVL Swivel Canopy (42 degree max)
TW	Textured White					UP1 Up Light (Indirect) Component - 16W / 1600 lm
WH	White					UP2 Up Light (Indirect) Component - 22W / 2220 lm
YL	Yellow (RAL 1018)					
Note: TB, TG, TW are ultra fine textured matte finishes. Contact your local representative for color swatches.		*Note: Suspension refers to stem length only, NOT overall fixture height. Refer to line drawing. Contact factory for extended drops - may affect price and lead time.				AMF Note: Antimicrobial powder coat is applied to the exposed metal fixture parts and can inhibit the growth of mildew and spoilage causing microbes on the finish. Diffuser is not antimicrobial.
Note: Antimicrobial finishes available in a select number of finishes. Refer to the Options section of this sheet for details ("AMF").						

Universal Footnotes (only applies if superscript is shown in Options section): (0) 90R - All LEDs/CCTs are being transitioned to 90 CRI standard over 2025. Inquire for this model's availability. (1) BAC/BAB - www.brownlee.com/resources/usa. (2) BBI/BBC - cannot combine with ECW or EXT. (3) BLD - integral microwave motion sensor (step-dim). Cannot combine with DTR. (4) DTR - cannot combine with BLD. (5) ECW - cannot combine with BBI, BBC, or DTR. (7) FCL - cannot combine with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes J48 labeling and 90 CRI LEDs. (10) PCH/PC4 - cannot combine with BLD or OCC.


Add'l Notes: **BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F.

**BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%.

2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Config. via onboard dip switches.

Specifications subject to change without notice.

PROJECT:
MODEL #:
FIXTURE TYPE:

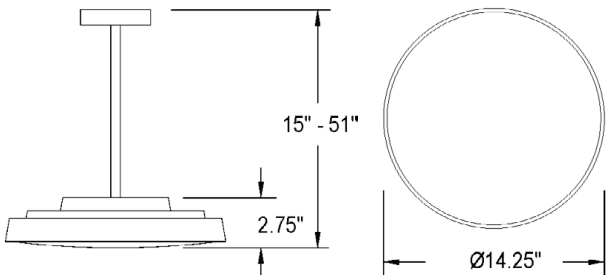

WET

RoHS
COMPLIANT
ELECTRONICS



BROWNLEE
LIGHTING

www.brownlee.com

REVISED
2024.12.19