



WHL diffuser



WHL diffuser

2322 LED

The 2322 is a decorative yet functional flush mount with several fabric options to choose from. Peruse our fabric offering in the resources section of the website for a variety of coordinating fabric pendants and sconces.

TRIM FINISHES



FABO

STANDARD SPECIFICATIONS

PAN

Cold rolled steel, formed in a die, finished with an electroplated brushed nickel coating that will withstand most nicks and scratches.

DIFFUSER

Translucent, UV stabilized white acrylic. The drum shape features a fabric material bonded to the walls, allowing for ease of cleaning with a dry or damp cloth. You can choose from a selection of fabrics.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

B12 - 12W nominal, .10 A input - 1547 lm. Dimmable (0-10V).

C17 - 16W nominal, .15 A input - 2235 lm. Dimmable (0-10V).

C24 - 23W nominal, .20 A input - 3066 lm. Dimmable (0-10V).

MOUNTING

The 2322 is designed to be mounted directly to a j-box (by others). Mounting hardware included.

FINISH

The standard finish is a sturdy electroplated brushed nickel. Options include all Brownlee paint finishes. Plated finishes such as Brushed Nickel are suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.


PROJECT:

MODEL #:

FIXTURE TYPE:



BN finish, GYL diffuser

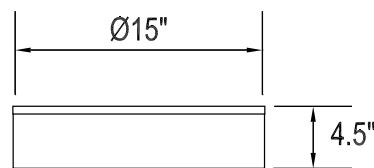

DAMP



RoHS
COMPLIANT
ELECTRONICS



ORDERING INFORMATION

2322 - Model - 2. - 3. - 4. - 5. - 6. (if required)

2. FINISH

STANDARD
BN Brushed Nickel

OPTIONAL
BL Black
BZ Bronze
GM Gun Metal
MB Metallic Bronze
MG Metallic Gold
NT Nickel Tone
WH White

CUSTOM
Provide color sample or
RAL code to match

3. WATTAGE

B12 12W B Series LED
C17 16W C Series LED
C24 23W C Series LED

4. DIFFUSER

WHA White Acrylic
GYL Grey Linen
NAL Natural Linen
WBK Woven Black
WHL White Linen

5. COLOR TEMPERATURE

35K 3500K standard color temperature
27K 2700K color temperature
30K 3000K color temperature
40K 4000K color temperature

6. AVAILABLE OPTIONS

90R⁰ 90 CRI (3000K only)
BAC¹ Buy American Compliant (BAA)
BLD^{3}** Bi-Level Dimming
DTR⁴ Triac (Line Voltage)
Dimming (120V)
FCL⁷ French Canadian Labels
OCC⁸ Occupancy Sensor
T24⁹ Title 24 JA8 Compliant (B12 & C24
in 3000K only)

Universal Footnotes (only applies if superscript is shown in Options section): (0) **90R** - All LEDs/CCTs are being transitioned to 90 CRI standard over 2025. Inquire for this model's availability. (1) **BAC/BAB** - www.brownlee.com/resources/usa. (2) **BBI/BBC** - cannot combine with ECW or EXT. (3) **BLD** - integral microwave motion sensor (step-dim). Cannot combine with DTR. (4) **DTR** - cannot combine with BLD. (5) **ECW** - cannot combine with BBI, BBC, or DTR. (7) **FCL** - cannot combine with BAC. (8) **OCC** - integral microwave motion sensor (ON/OFF). (9) **T24** - includes JA8 labeling and 90 CRI LEDs. (10) **PCH/PC4** - cannot combine with BLD or OCC.

Add'l Notes: ****BBI/BBC** - BBI minimum operating temp: 10C/50F unless otherwise stated. **BBC** minimum operating temp: -20C/-4F.

****BLD** - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%.

2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Config. via onboard dip switches.

Specifications subject to change without notice.